

## **Essex Asbestos Testing Ltd**



8007

15 Lampits Lane, Corringham, Essex, SS17 9AD. Tel: 01375 643863 or 07967 118686 E-mail: info@essex-asbestos-testing.co.uk Web: www.essex-asbestos-testing.co.uk

## **AIRBORNE FIBRE COUNT CERTIFICATE**

Report No: F/23/1261 Date on Site: 07.09.2023 Time on site: 0700 hours Technician: lan Elder

Client name and address: Horizon Environmental Ltd, Ovendon House, Willcox Close, Aylesham, Kent CT3 3EP

Contact name: C. Smith

Contractor's name and address: Horizon Environmental Ltd, Ovendon House, Willcox Close, Aylesham, Kent CT3 3EP

Site supervisor: N. Davis

Site address: Former Holloway Prison, Parkhurst Road, London. N7 ONU


Location on site: Boiler House and adjacent areas

Brief description of work being carried out: Remedial work in progress

Description of testing to be carried out: Far Source Testing

Comments: All air test results were satisfactory.

Opinions and interpretations contained in this report are clearly marked and are outside the scope of Essex Asbestos Testing's UKAS accreditation.

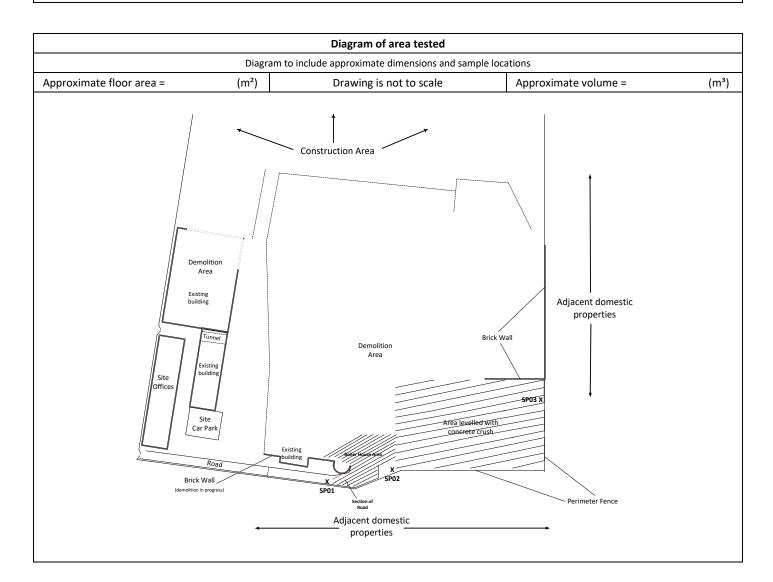

Report No: <u>F/23/1261</u>

## **AIRBORNE FIBRE COUNT CERTIFICATE**

Technical details									
Microscope No:	MIC4	Filter batch No:	411	Low Flow meter No:	LFM5				
Phase Telescope No:	PT2	Microscope set up:	Yes	High Flow meter No:	MFM5				
N.P.L. Test slide No:	NPL4	No of N.P.L. blocks visible:	5	Flow rate correction required:	No				
Stage Micrometer No:	SM4	Graticule diameter (μm):	101	Exposed filter measurement (mm²):	394.48				
Bar/Ther/Time piece No:	BTT4	Lab type:	Mobile	Reg No.	YH68 HMJ				

Type of test:	(B) Background,	(L) Leak,	(N) Near Source Sampling	(R) Reassurance,	Source/perimeter Sampling	(WA) Work area,	(FB) Field Blank
---------------	-----------------	-----------	-----------------------------	------------------	---------------------------	-----------------	------------------

Sample	Technician's	Initials	Pump	Cowl	Test	Start	Finish	Duration	Flow rate (I/min)		nin)	Volume
Number	Sampler	Analyst	No.	No.	Туре	Time	Time	(mins)	Start	Finish	Average	(litres)
S001	IE	IE	HFP 66	B1	F	0902	1131	149	8.0	8.0	8.0	1192
S002	IE	IE	HFP 67	B2	F	0903	1132	149	8.0	8.0	8.0	1192
S003	IE	IE	HFP 68	В3	F	0918	1134	136	8.0	8.0	8.0	1088
S004	IE			BFB	FB							
S005	IE	IE	HFP 66	B4	F	1222	1423	121	8.0	8.0	8.0	968
S006	IE	IE	HFP 67	B5	F	1223	1424	121	8.0	8.0	8.0	968
S007	IE	IE	HFP 68	В6	F	1225	1426	121	8.0	8.0	8.0	968
						END						

Sample Number	Sample Location (Refer to diagram)	No of fibres counted	No of fields counted	No of fields rejected	Calculated result (f/ml)	* Limit of quantification (f/ml)	Reported result (f/ml)
S001	SP01	5	161	2	0.001	0.005	< 0.005
S002	SP02	3	161	0	0.001	0.005	< 0.005
S003	SP03	4.5	176	0	0.001	0.005	< 0.005
S004	Field Blank						
S005	SP01	4	198	0	0.001	0.005	< 0.005
S006	SP02	2.5	198	0	0.001	0.005	< 0.005
S007	SP03	6.5	198	0	0.002	0.005	< 0.005
		END					

We hereby declare that all sampling and analysis was carried out in accordance with HSE Guidance note HSG 248: The Analyst Guide and Essex Asbestos Testing Ltd in-house procedures.

## Note. \*Uncertainty of measurement.

The lower limit of quantification for the above method is stated in HSG 248 as about 0.01 f/ml, when sample volumes ≥ 480 litres of air are collected and 200 graticule areas examined, a calculated result below the limit may be expressed as <0.01 f/ml. For sample volumes < 480 litres and/or <200 graticule areas examined the lower limit of quantification will be higher. The reported result is for respirable fibres only.

Issued by (Print Name): Ian Elder Signature: Date: 07.09.2023